

SM11021 (Single Display) Commercial Monitor



The picture is for reference only, please refer to the actual product

Product Features


- Support for 7*24 hours uninterrupted operation;
- Support for RS232 loop connection and remote control;
- Support to customize the full-screen image when the machine has no signal
- When there is a signal input, the signal source is intelligently identified and the device can automatically switch to the corresponding channel without manual adjustment
- Support Intel OPS specification computer, through HDMI, USB and other data connections to achieve audio, video and data file communication

Product Specification

Specification	Model No.	Parameters
Panel	Panel size	110"
	Panel grade	A grade
	Back light	LED
	Resolution	3840 x 2160pixels
	Brightness	400cd/m ² (typ.)
	Contrast ratio	1200:1(typ.)
	Pixel pitch	0.6345×0.6345mm (H×V)
	Frame rate	60Hz
	Viewing angles	178°(H)/178°(V)
	Back light life	50,000hrs(min.)
	Color saturation	69%
	Visual area	2436.48(H)mm x 1370.52(V)mm
	Colour degree	1.07B (8-bit + Hi-FRC)
Scalar	Chip	MSD3683
Power Supply	Power supply	100-240V, 90-264V (Max.), 50/60Hz
	Power consumption (Max.)	≤550W
	Standby power consumption	< 0.5W
	Speaker	2 x 10W(max)
	Power supply (AC) input	100-240V
	Switch	Rocker switch
Environment	Working temperature	0°C ~ 40°C
	Storage temperature	-20°C ~ 60°C
	Working humidity	10% ~ 90% RH non-condensing
Input Interface	HDMI IN	1
	VGA IN	1
	AUDIO IN	1
	CVBS input	1
	DVI IN	1
	USB2.0	1
	RS232	1
	80PIN OPS JAE	1
Output Interface	EARPHONE OUT	1
	RS232	1
OPS (optional)	USB	USB2.0 x 2;USB3.0 x 2
	LAN interface	1
	HDMI output	1
	LINE-OUT	1
	MIC-IN	1

Specification	Model No.	Parameters
Structure	Net weight	128KG±1KG
	Gross weight	153KG±1KG
	Outline dimension (W x H x D)	2477.1*1411.4*90mm
	Package size (W x H x D)	H2660*W300*H1670mm (without pallet)
	Shell material	Aluminum frame + sheet metal + aluminum-plastic panel
	Color	Front frame (black) Back shell (black)
	Frame width (T/B/L/R)	15.9/20.1/15.9/15.9
	VESA standard	1000*400
Language	OSD	Chinese. English, etc
Accessories	Remote control	1
	Power supply cable	1 (1.5M)
	User manual	1
	Universal quick start	1 (A5 folded)
	Batteries	1(pair)
	Wall mounted	1

Six views

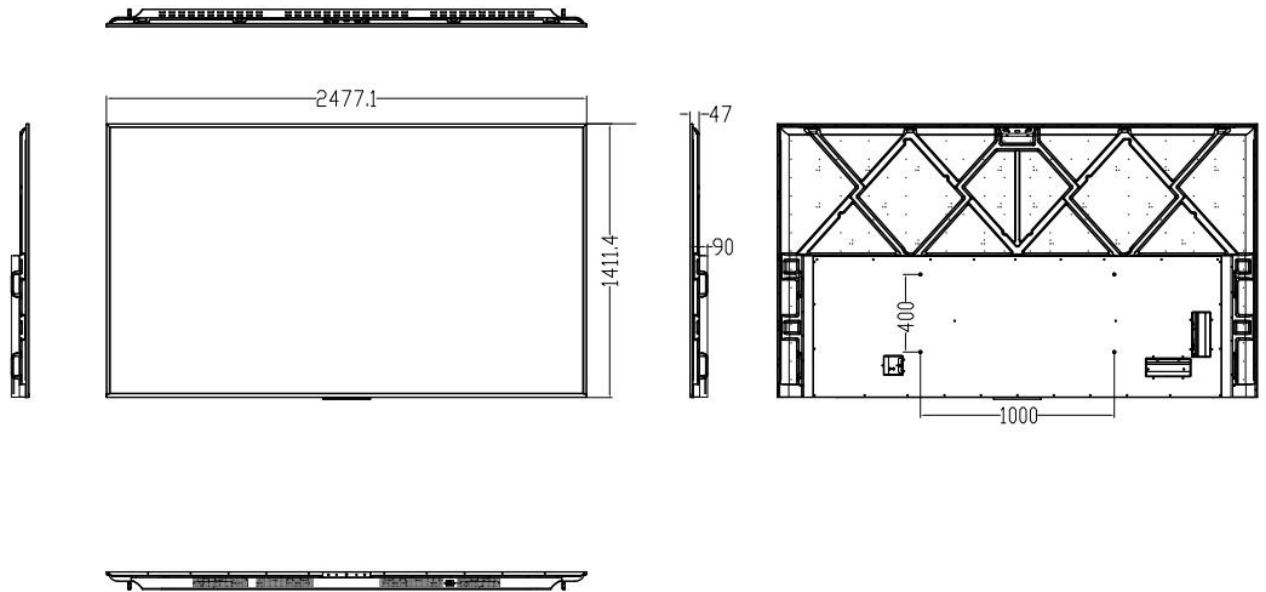

*Disclaimer

Due to product configuration and manufacturing process, actual body size/body weight may vary, please refer to the actual product.

The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, colour and size) may vary slightly.

Please refer to the actual product.

In order to provide accurate specifications as far as possible, the text expressions and pictures in this specification may be adjusted and revised in real time.

The product specification may be adjusted and revised in order to match the actual product performance and specifications.

In the event that such changes and adjustments are necessary, no special notice will be given.